


BJ		Bottom 1/2" thinner, sides 1/2" taller 7/21/11	Ш
 BJ	3/20/08	Back pleces 2" thick. Right/Left pleces 1-3/8" thick. Front/Back 45-13/16" wide.	D
	9/12/07	Added third cutout on Back piece	С
	8/14/07	Front/Back o'all length 45 9/16" Right/Left thickness 1.5"	Φ.
	8/3/07	Initial Release	Α
Appr.	Date	REV Description	REV

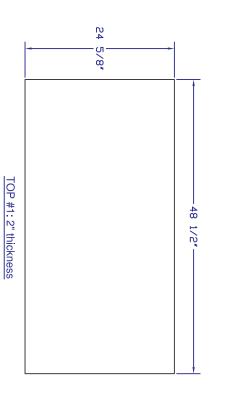

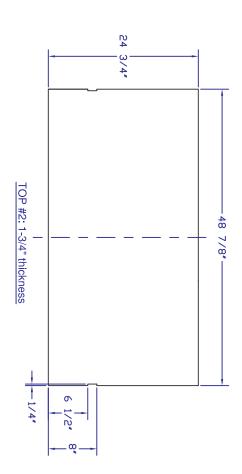

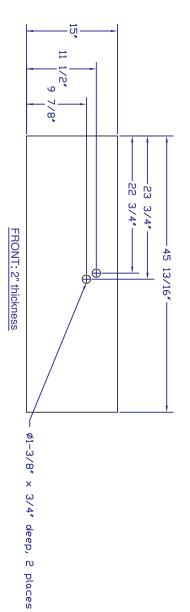

NOTES:

- Material is Dow Styrofoam "Blueboard" or equivalent (insulation value R5 per inch or better).
 Pieces can be single layers or built up from several thin layers.
 Tolerances ±1/8"
 Complete set consists of:

 Top #1: 1x
 Top #2: 1x
 Bottom: 1x
 Front: 1x

 Back: 1x
 Right/Left: 2x

Back Insert #1: 3x Back Insert #2: 3x 5. Back Inserts made of material removed from Back pieces. 6. See sheet 2 for remaining pieces.

Polar Permane	Polar Permanent GPS Station	Part Number		Rev
MM24 Enclosu	MM24 Enclosure Foam Insulation	PPS-EN-005	I-005	Э
	INAVCO Inc	Drawing:	S. White	
		Engineering: S. White	S. White	
	POLAR SERVICES	Approval: B. Johns	B. Johns	
UNAVCO	AVCO 6350 Nautilus Dr., Boulder CO 80301 Date Modified: July 21 2011	Date Modified:	July 21 2	011
	303-381-7500, 303-381-7451 fax	SHEET 1	OF 2	